VACOM®

EN

ISO and KF Standard Viewports

Viewports for Industrial Systems / High Vacuum Applications




- Tested product with proven technologies and simple handling
- Long-term availability from stock
- Maximum possible view diameters in all nominal sizes

NICHTS ist unerreich*bar.*

Technical Data

■ **Optical Material**	Borosilicate Glass	
■ **Window Mounting**	FKM O-Ring, demountable	
■ **Transmission Range**	Approx. 400 to 2,500 nm	
■ **Flange material**	KF and ISO-K	1.4404 (316 L)
	ISO-F	Aluminum (anodized)
■ **Max. Operation Temperature**	150 °C	
■ **Helium Leakage Rate**	$1 \cdot 10^{-9}$ mbar · l/s	
■ **Mounting**	■ Wall mounting ■ Flange mounting with and without centering (seal included)	


External Transmission

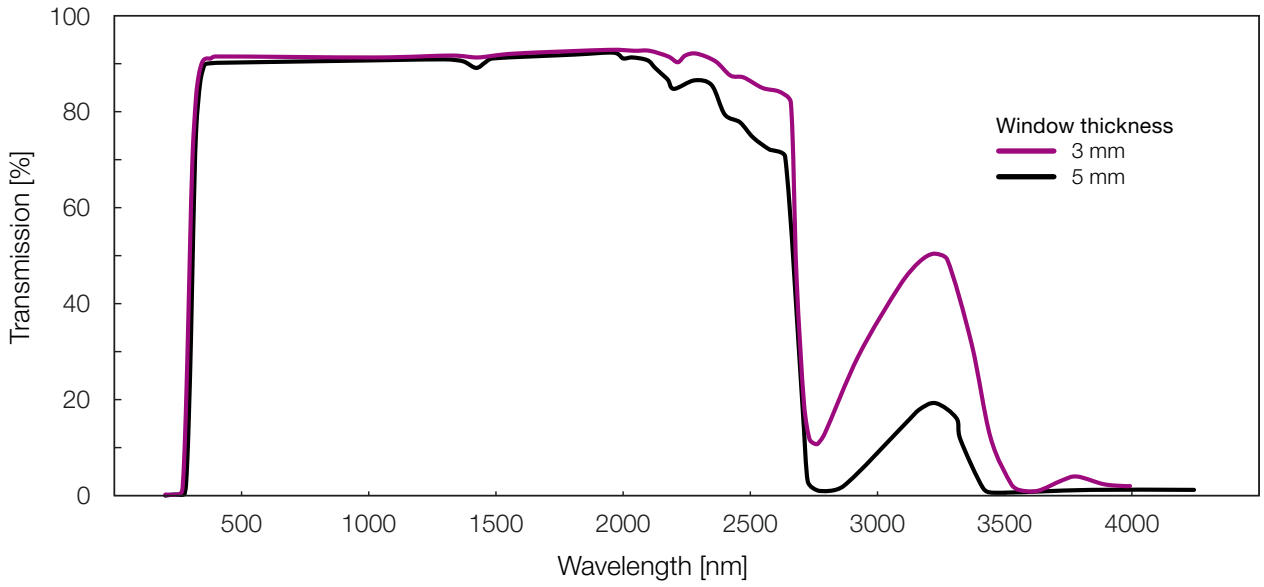

* The curves shown are theoretical values – real values may deviate.

Accessories

Replacement Glass

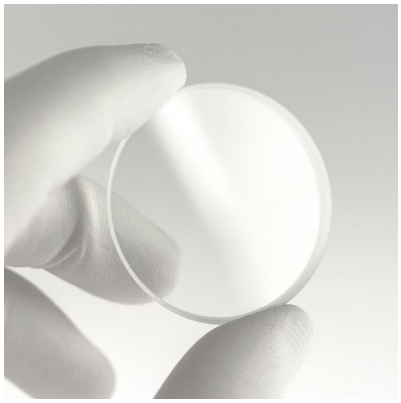

Replacement O-Rings



Clamps / Claw Clamps



All rights and technical alterations reserved.
201704 – Vacuum Optics

VACOM Vakuum Komponenten & Messtechnik GmbH ■ In den Brückenäckern 3 ■ 07751 Großlöbichau ■ Germany
Tel. +49 3641 4275-0 ■ Fax +49 3641 4275-82 ■ info@vacom-vacuum.com ■ www.vacom-vacuum.com ■ www.vacom-shop.com